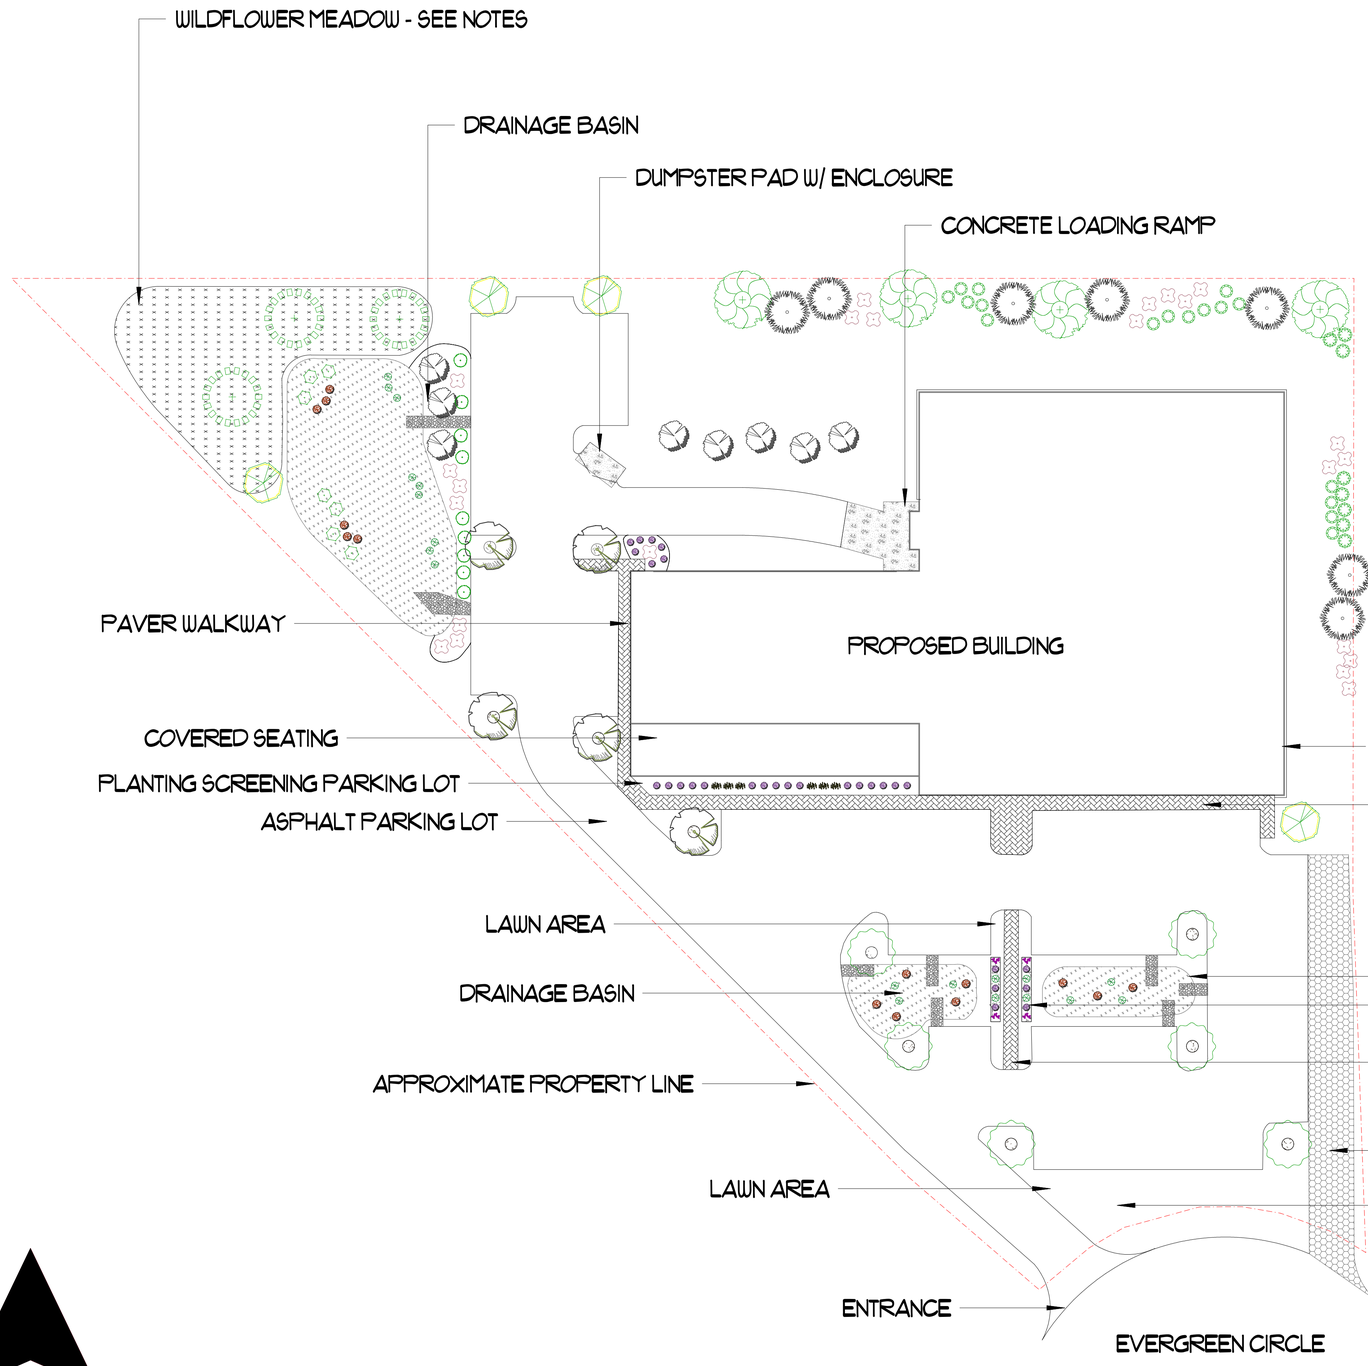


LEGEND

COMMON NAME	BOTANICAL NAME	QTY
FLOWER, GRASS		
GRASS, 'KARL FOERSTER'	CALAMAGROSTIS X ACUTIFLORA 'KARL FOERSTER'	6
FLOWER, PERENNIAL		
BLACK EYED SUSAN	RUDBECKIA FULGIDA 'VIETTE'S LITTLE SUZY'	12
SHRUB, DECIDUOUS		
BLUEBERRY	VACCINIUM CORYMBOSUM SPP.	8
HYDRANGEA, INCREDIBALL	HYDRANGEA ARBORESCENS 'ABETWO'	29
SUMMERSWEET, SWEET PEPPERBUSH	CLETHRA ALNIFOLIA 'HUMMINGBIRD'	17
VIBURNUM, AMERICAN CRANBERRYBUSH	VIBURNUM TRILOBUM	14
VIBURNUM, ARROWWOOD	VIBURNUM DENTATUM	23
SHRUB, EVERGREEN BROADLEAF		
INKBERRY, COMPACT	ILEX GLABRA 'COMPACTA'	19
WINTERBERRY	ILEX VERTICILLATA	9
TREE, DECIDUOUS		
AMELANCHIER, ALLEGHENY	AMELANCHIER LAEVIS	7
BIRCH, PAPER OR WHITE	BETULA PAPYRIFERA VAR. COMMUTATA	3
DOGWOOD, KOUSA 4	CORNUS KOUSA	6
HOPHORNBEAM, AMERICAN	OSTRYA VIRGINIANA	4
OAK, WHITE	QUERCUS ALBA	4
REDBUD - EASTERN	CERCIS CANADENSIS	5
TREE, EVERGREEN		
CEDAR, EASTERN RED	JUNIPERUS VIRGINIANA	8
PINE, WHITE	PINUS STROBUS	7

NOTES:
-LOCATIONS ARE BASED OFF SITE PLAN PROVIDED BY OTHERS
-ALL MATERIALS TO BE APPROVED BY OWNER
-ALL UTILITIES TO BE VERIFIED BY DIGSAFE
-IRRIGATION TO BE INSTALLED TO ALL FINISHED LAWN AREAS AND PLANTING BEDS
-WELL TO BE INSTALLED FOR IRRIGATION
-ALL PLANTINGS TO BE INSTALLED BASED ON AMERICAN NURSERYMAN STANDARDS
-ALL PLANT CAGES AND BALLING/POTTING MATERIAL TO BE REMOVED
-PLANTING BEDS TO BE PREPARED WITH 50/50 COMPOST AND LOAM WELL MIXED
-PLANTING BEDS TO BE MULCHED TO A DEPTH OF 2"
-ALL LAWN AREAS TO BE PREPARED WITH MINIMUM 5" OF SCREENED LOAM
-DRAIN BASINS TO BE PREPARED AND SEEDED WITH FESCUE BLEND
-FINISHED LAWN AREAS TO BE HYDRO-SEEDED WITH RYE/BLUEGRASS/FESCUE BLEND
-WILDFLOWER MIX TO INCLUDE NATIVE POLLINATOR PERENNIALS SUCH AS: ECHINACEA, COREOPSIS, LUPINE ETC.

Revision #: 4 Date: 11/22/2024	Scale: 1" = 30'	Landscape Plan: 1 Island Pickle - Mashpee, Ma	Landscape Design by: Michael Szarlan Clipper Landscape LLC.